



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Q75615
121

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02360219.6

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

MÜNCHEN, DEN
MUNICH,
MUNICH, LE

18/03/03



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 02360219.6

Anmeldetag:
Date of filing:
Date de dépôt: 22/07/02

Anmelder:
Applicant(s):
Demandeur(s):
EVOLIUM S.A.S.
75008 Paris
FRANCE

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:

Method for providing service management to network elements of a cellular communication network

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

H04Q7/38

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing:
Etats contractants désignés lors du dépôt:

AT/BG/BE/CH/CY/CZ/DE/DK/EE/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/

Bemerkungen:
Remarks:
Remarques:

METHOD FOR PROVIDING SERVICE MANAGEMENT TO NETWORK ELEMENTS OF A CELLULAR COMMUNICATION NETWORK.

BACKGROUND OF THE INVENTION

5 The present invention relates to service management of network elements in a in a cellular communication network and more precisely to a method for controlling the data exchange format used between the network elements and the operation and maintenance center of the cellular communication network.

10 Due to different technologies implemented on different network elements (e.g. Radio network Controller RNC, Node B, Base Transceiver Station BTS ...) in a single cellular communication network and because frequent software upgrades have to be performed on these network elements, the format used for exchanging data between the network
15 elements and the Operation and Maintenance Center is subject to frequent modifications. The data exchange format are usually called Management Information Base in the context of network elements communicating with the Operation and Maintenance Center. For example, the data exchange format must be changed when a new feature at a network element requires
20 an additional parameter to be transmitted to the Operation and Maintenance Center.

 Known in the art is that different mediation servers are implemented at the Operation and Maintenance Center to cope with the different data formats received from the different types of network elements. The task of a
25 mediation server consists in translating a data following a predefined data format destined to the Operation and Maintenance Center in a Operation and Maintenance Center internal data format and vice-versa. Consequently, one mediation server per data exchange format should be available.

Such a prior art system is described in figure 1. Two network elements RNC 11 and Node B 12 are connected to Operation and Maintenance Center 13 over two different mediation servers 131 and 132. Mediation server 131 is specifically adapted to handle data having a first data exchange format used by RNC 11 and mediation server 132 is specifically adapted to handle data having a second data exchange format used by node B 12. Mediation servers 131 and 132 respectively convert the received data in a Operation and Maintenance Center internal data format used for performing common management functionality at module 133.

10 This solution presents the drawback that a change of data exchange format consecutive to a software upgrade at a network element necessitates to change the handling mediation server. This procedure is time consuming because it implies an Operation and Maintenance Center reload as well as a service management outage. Another disadvantage of such an architecture is that some mediation servers can be overloaded while other are almost unused.

A particular object of the present invention is to provide a method for mitigating the previously listed drawbacks.

SUMMARY OF THE INVENTION

20 These objects, and others that appear below, are achieved by a method for providing service management to network elements of a cellular communication network according to claim 1, and a mediation server according to claim 5.

25 According to the present invention, a generic mediation server is provided for, supporting a method comprising the steps of detecting a change in the data exchange format upon reception of data from a network element and of switching dynamically from the translation of a old data exchange format to the translation of the new identified data exchange

format in a predefined Operation and Maintenance Center internal data format.

The method according to the present invention presents the advantage that no management service interruption is necessary when a software upgrade is performed.

Another advantage of the present invention is to have a better load balancing between several mediation servers since according to the invention all mediation servers can dynamically handle all the data exchange formats received from the network elements.

Further advantageous features of the invention are defined in the dependent claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Other characteristics and advantages of the invention will appear on reading the following description of a preferred embodiment given by way of non-limiting illustrations, and from the accompanying drawings, in which:

- Figure 1 shows a prior art system comprising network elements and an Operation and Maintenance Center comprising mediation servers;
- Figure 2 shows an implementation of a system comprising network elements and an Operation and Maintenance Center with a generic mediation server according to the present invention;
- Figure 3 shows the internal structure of a generic mediation server according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 shows a prior art system comprising network elements and an Operation and Maintenance Center comprising mediation servers which has been described in relation with prior art.

Figure 2 shows an implementation of a system comprising network elements and an Operation and Maintenance Center with a generic

mediation server according to the present invention. The system shown in figure 2 comprises two network elements RNC 21 and Node B 22 and an Operation and Maintenance Center 23 comprising a mediation server 231 according to the present invention.

5 It will be clear for a person skilled in the art that a plurality of network elements may be supported by the system but were reduced to two for sake of simplicity.

RNC 21, respectively Node B 22 uses a first, respectively a second data exchange format for communicating with the Operation and
10 Maintenance Center 23. At Operation and Maintenance Center 23, the data are handled by a generic mediation server 231 which is adapted to translate the respective receive data exchange formats in an OMC internal data format used at module 232 performing common management functionality.

15 In a preferred embodiment of the invention a functionality performed at module 22 consists in downloading new software to network elements RNC 21 or Node B 22.

According to the present invention, a generic mediation server 231 can identify a change in the data exchange format used by one network
20 element or while handling several network elements using different data formats, a change in the data exchange format due to the reception of data from different network elements.

Upon identifying such a change, mediation server 231 is able to dynamically switch from an old data exchange format to a new identified
25 data exchange format without performing a restart or a reboot at the Operation and Maintenance Center 23. As a consequence, the service provided by Operation and Maintenance Center 23 is not interrupted.

In this embodiment of the present invention, the mediation server 231 is part of the Operation and Maintenance Center 23. In an alternative

embodiment of the invention, mediation server 231 may be a stand alone device connectable to Operation and Maintenance Center over usual communication links. In such a case, mediation server 231 and Operation and Maintenance Center 23 may be manufactured by different
5 manufacturers so that an appropriate interface between mediation server 231 and Operation and Maintenance Center 23 has to be defined.

In a preferred embodiment of the invention, several identical mediation servers 231 are available to handle the traffic between the network elements and the Operation and Maintenance Center. In this case,
10 a control entity should be available for selecting one of the mediation servers 231 for handling the data to be exchanged between a network element 21, 22 and the Operation and Maintenance Center 23 preferably according to a usual predefined load balancing policy.

Figure 3 shows the internal structure of a generic mediation server
15 according to the present invention. Mediation server comprises means 31 for identifying a change in the used data exchange format, means 32 for dynamically switching from an old used data exchange format to a new identified data exchange format.

Means 31 for identifying a change in the used data exchange
20 format are connected to a mediation server interface 33 towards network elements. Upon reception from data over interface 33, means 31 for detecting a change in the used data format check if the received data exchange format matches with a data exchange format stored previously. If not, it triggers means 32 for dynamically switching from a old data
25 exchange format to a new identified data exchange format. For this purpose, means 32 preferably supports the features "class dynamic loading" available in the Java programming language. This feature enable to load a class of objects corresponding to the new data exchange format

without requiring a restart of the mediation server or of the Operation and Maintenance Center if the mediation server is part of it.

This presents the advantage to reduce the outage time of the Operation and Maintenance Center and as a consequence increase the performance of the system.

Moreover, means 32 translate the received data in an Operation and Maintenance system internal format. The translated data are further sent over an interface 34 to the Operation and Maintenance Center part dealing with common management functionality.

10

CLAIMS

- 1/ Method for providing service management to network elements (21, 22) of a cellular communication network, said network elements (21, 22) communicating with an Operation and Maintenance Center (23) of said cellular communication network by sending data having a data exchange format, said data exchanged format being translated in an Operation and Maintenance Center specific data format at a mediation server (231), said method being characterized in that it comprises the steps of:
- 10 - identifying at said mediation server (231) a change in said used data exchange format;
- dynamically switching from an old data exchange format to said new identified data exchange format.
- 2/ Method according to claim 1, characterized in that it further comprises the steps of:
- representing said data exchange format in an object oriented programming, each of said data exchange format being represented by a class;

- using the feature "class dynamic upload" of the Java programming language to switch from an old data exchange format to a new identified data exchange format.
- 5 3/ Method according to claim 1, characterized in that it comprises a step of:
selecting one out of a plurality of mediation servers (231) for handling
information from a network element (21, 22) according to a predefined load
balancing policy.
- 10 4/ Method according to claim 1, characterized in that said data exchanged
between said network element (21, 22) and said Operation and Maintenance
Center (23) consist in new software version download from the Operation and
Maintenance Center (23) to said network element (21, 22).
- 15 5/ Mediation server (231) to be used for translating a data exchange format
used by a network element (21, 22) of a cellular communication network to a
Operation and Maintenance Center specific data format; said mediation
server being characterized in that it comprises:
- means for identifying a change in said used data exchange format;
- 20 - means for dynamically switching from an old data exchange format to said
new identified data exchange format.
- 6/ Mediation server according to claim 5, characterized in that said means for
dynamically switching from an old data exchange format to said new
25 identified data exchange format further uses the feature "class dynamic
loading" of the Java programming language.
- 7/ Mediation server according to claim 5, characterized in that it is a software
component part of an Operation and Maintenance Center (23).

8/ Mediation server (231) according to claim 5, characterized in that it is a software component on a stand alone device connectable to an Operation and Maintenance Center (23).

A B S T R A C T

METHOD FOR PROVIDING SERVICE MANAGEMENT TO NETWORK ELEMENTS OF A CELLULAR COMMUNICATION NETWORK.

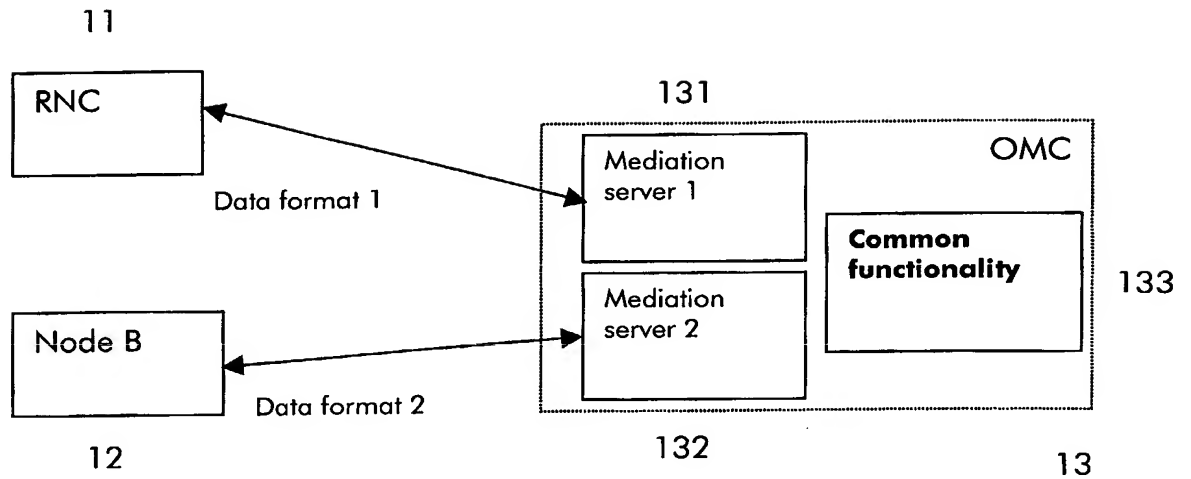
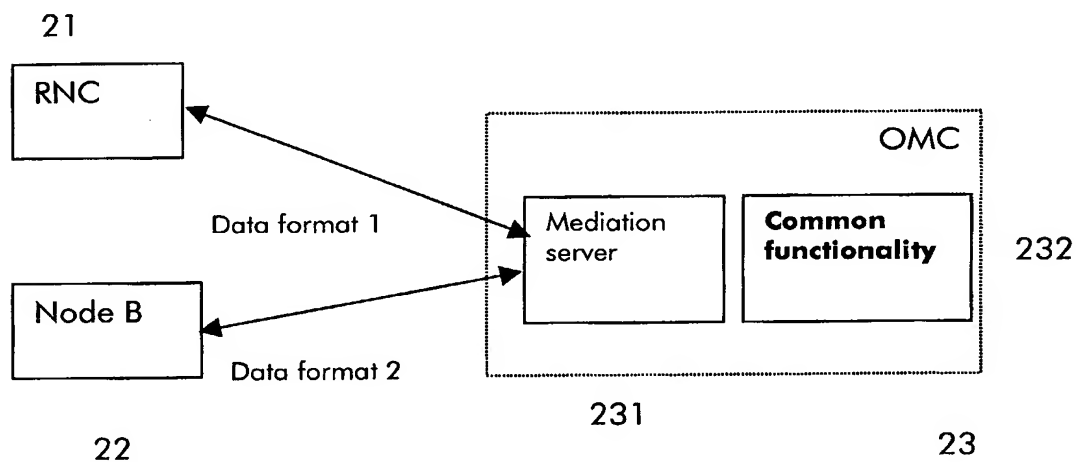
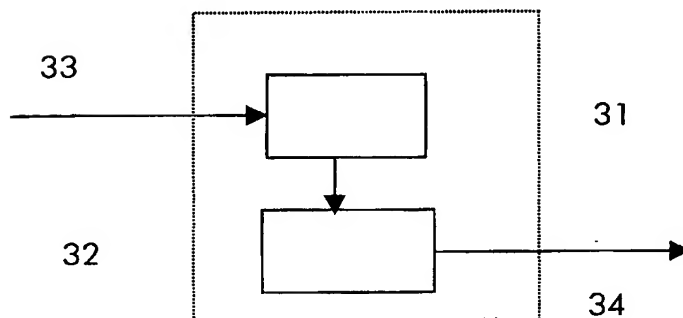
5

The invention relates to a method for providing service management to network elements (21, 22) of a cellular communication network, said network elements (21, 22) communicating with an Operation and Maintenance Center (23) of said cellular communication network by
10 sending data having a data exchange format, said data exchanged format being translated in an Operation and Maintenance Center specific data format at a mediation server (231).

According to the invention, the method comprises the steps of:

- identifying at said mediation server (231) a change in said used data
15 exchange format;
- dynamically switching from an old data exchange format to said new identified data exchange format.

Fig 2

**Fig 1****Fig 2****Fig 3**

